



07-1-18-8 Dufferin Grove Park (Bloor St W and Dufferin St) - KEY MAP AND CONTEXT DIAGRAM

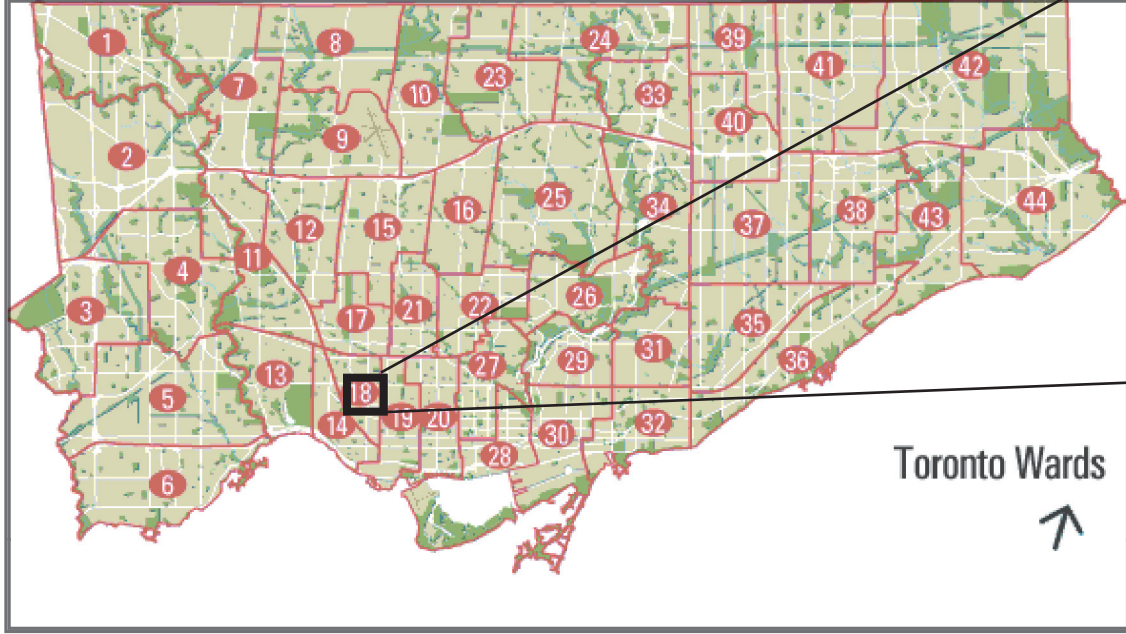

Toronto Wards
↑

KEY MAP

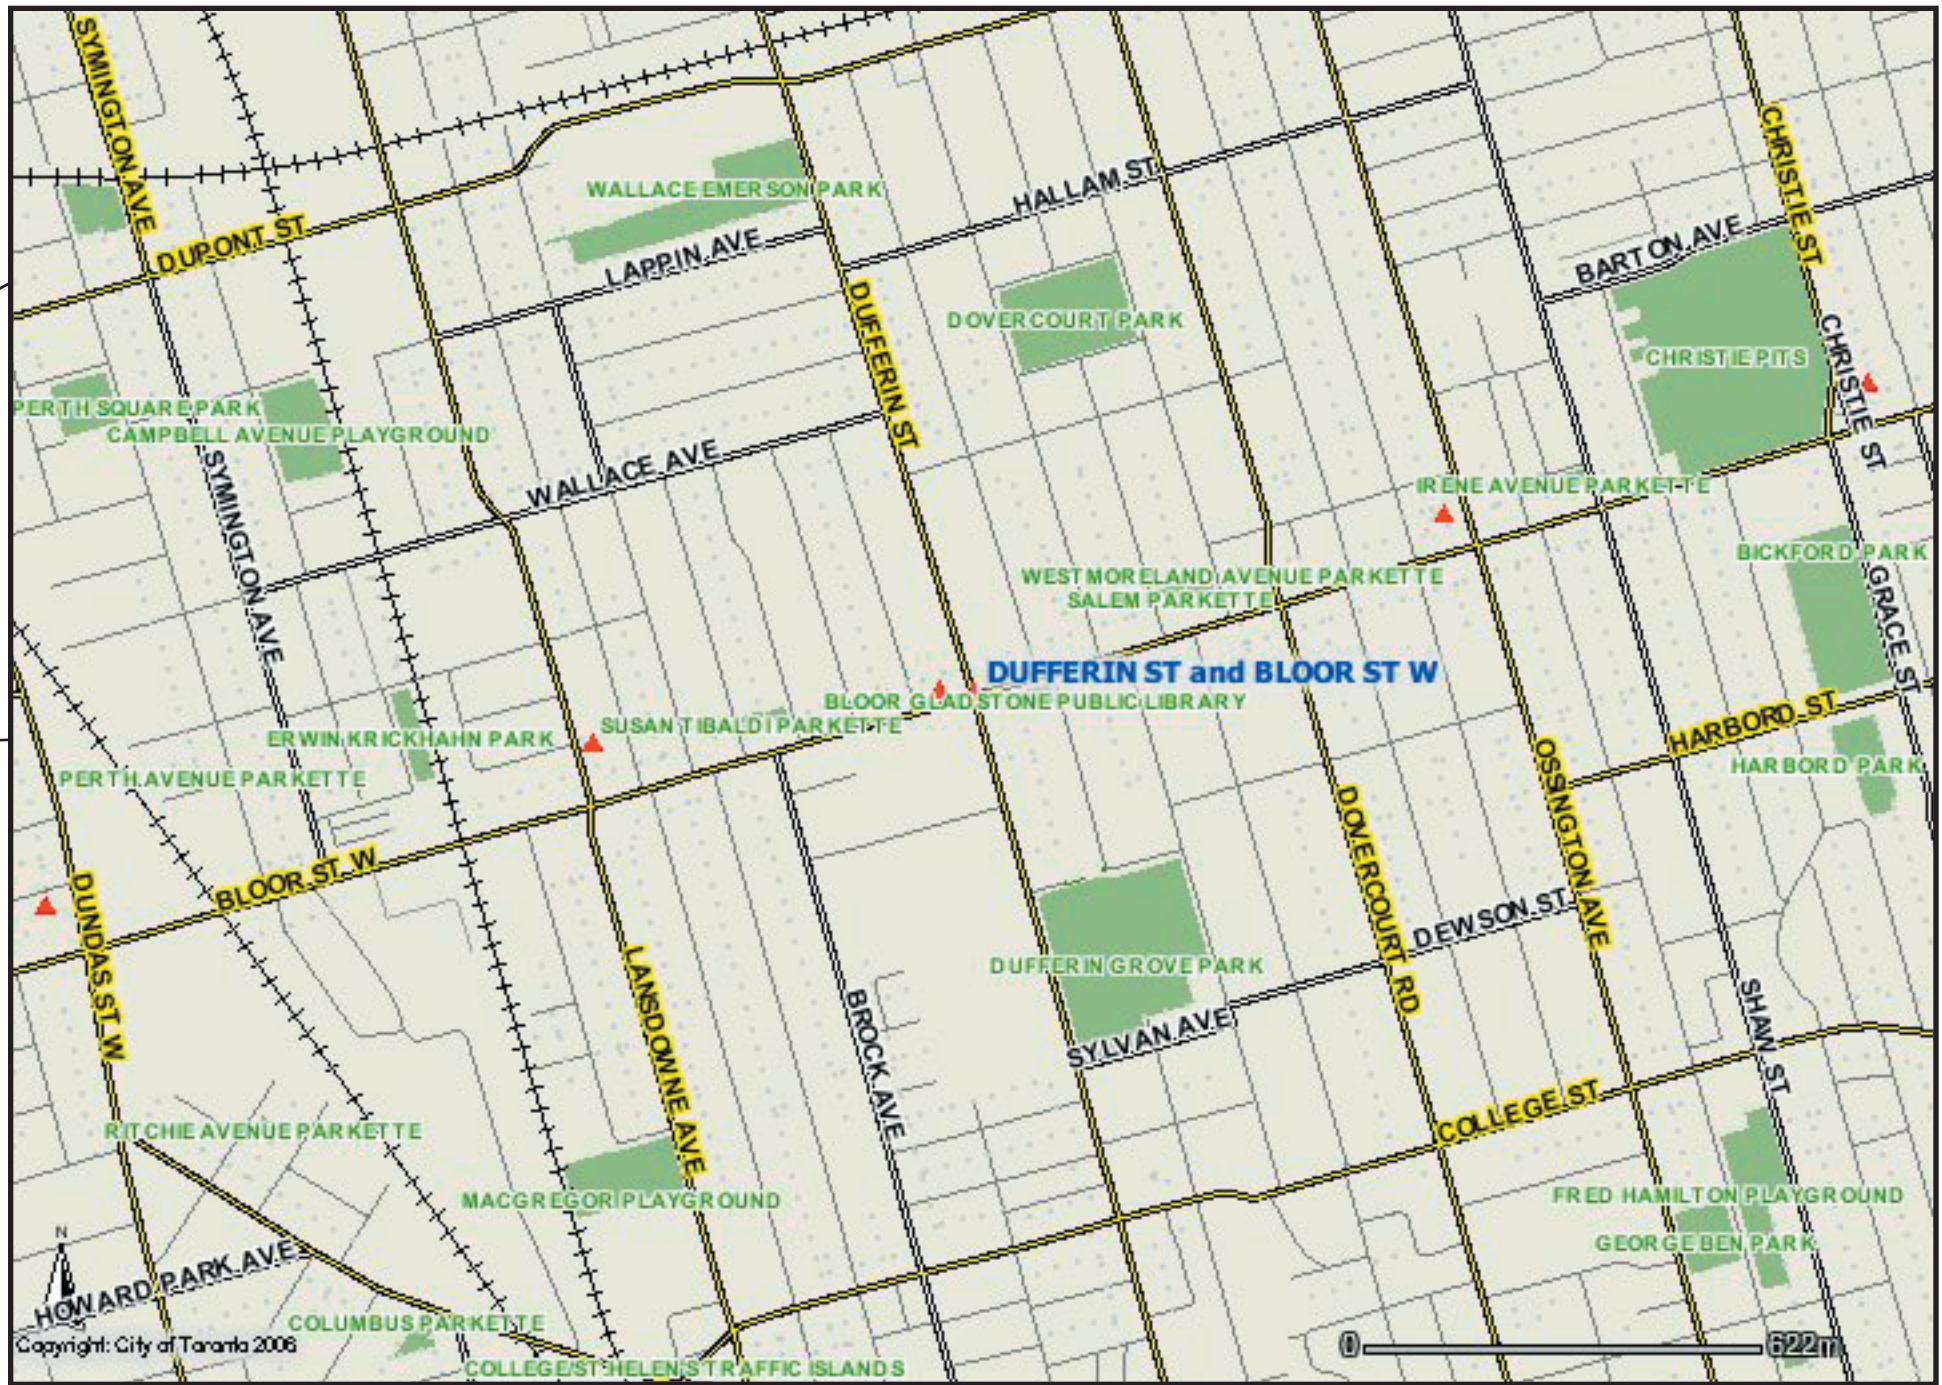

CONTEXT DIAGRAM

07-1-18-8 Dufferin Grove Park (Bloor St W and Dufferin St) - PLANTING PLAN



07-1-18-8 Dufferin Grove Park (Bloor St W and Dufferin St) - PLANT LIST

QTY Bed 1	QTY Bed 2	CODE	BOTANICAL NAME	COMMON NAME	SIZE	COND.
4	4	CALIPER TREES				
2	2	Lt	<i>Liriodendron tulipifera</i>	Tulip Tree	50mm	B&B
2	2	Qm	<i>Quercus macrocarpa</i>	Bur Oak	50mm	B&B
35	35	DECIDUOUS TREES				
5	5	Ar	<i>Acer rubrum</i>	Red Maple	175cm	B.R.
5	5	As	<i>Acer saccharum</i>	Sugar Maple	175cm	B.R.
10	10	Cc	<i>Cercis canadensis</i>	Redbud	175cm	B.R.
5	5	Ov	<i>Ostrya virginiana</i>	Ironwood	175cm	B.R.
5	5	Qm	<i>Quercus macrocarpa</i>	Bur Oak	175cm	B.R.
5	5	Qr	<i>Quercus rubra</i>	Red Oak	175cm	B.R.
		EVERGREENS				
5	5	Ps	<i>Pinus strobus</i>	White Pine	80cm	Potted
40	40	SHRUBS				
10	10	ac	<i>Amelanchier canadensis</i>	Serviceberry	60cm	B.R.
15	15	cs	<i>Cornus stolonifera</i>	Red Osier Dogwood	60cm	B.R.
5	5	sc	<i>Sambucus canadensis</i>	American Elder	60cm	B.R.
10	10	vl	<i>Viburnum lentago</i>	Nannyberry	60cm	B.R.
158		TOTAL NUMBER OF TREES AND SHRUBS				

PLANTING DESCRIPTION

Planting area for this drawing is a total of 300 m² as shown on the Planting Plan. There will be two planting beds and caliper tree plantings as shown on the Planting Plan.

Refer to Section 01010 - General Instructions which includes specifications to comply with the conditions of the quotation request, the contract documents and all of the requirements of Division 0 and Division 1.

Refer to Section 02070 - Site Preparation for specifications on the removal and disposal of rocks, branches, unwanted items, miscellaneous items and debris, site layout, rough grading, ploughing, addition of soil amendments and rototilling. Subsoiling is not required for site preparation.

Supply and install 5 cu. m. of Soil Mix Type 1: Composted Pine Mulch-Compost Type AA for planting bed preparation. Supply and install organic fertilizer at a rate of 25kg/100m² and granular bonemeal at a rate of 25kg/100m², following sub-soiling. Refer to Section 02070 - Site Preparation for specifications.

Refer to the Plant List and Section 02950 - Planting for specifications on planting and provisions for labour, materials, products, equipment and services necessary for planting operations to complete all naturalization planting beds and caliper tree plantings as indicated, including mulching and accessories. Refer to GN-1, D-1, D-2, D-3 and D-4 for planting details.

Refer to Section 02970 - Planting Maintenance for specifications on landscape and planting maintenance, consisting generally of, but not limited to, planting bed care, watering, weeding, replacement planting, tree and shrub pruning and cleanup, etc. as required and to the satisfaction of the City Representative.

Any work not included in a Specification Section listed above is to be included.

Arrange final acceptance meeting with the City Representative following the maintenance period. Failure to schedule final acceptance meeting extends warranty.